H3O S Series Template

Maxiumum Weight Load of 465 lbs / 210kg

Four Stainless Steel 5/16" Button Head Socket Cap Screws with Nylock Nuts, Fender Washers and/or Backing Plates, should be used. Center punch each hole. Start with a small drill bit and increase bit size to 5/16".

It is good practice to use tape on the surface to be drilled then drill the hole through the tape, this will avoid scratching/chipping of the surrounding surface.

Apply 3M 5200 sealant to seal drilled holes and the bottom of the mounting plates.
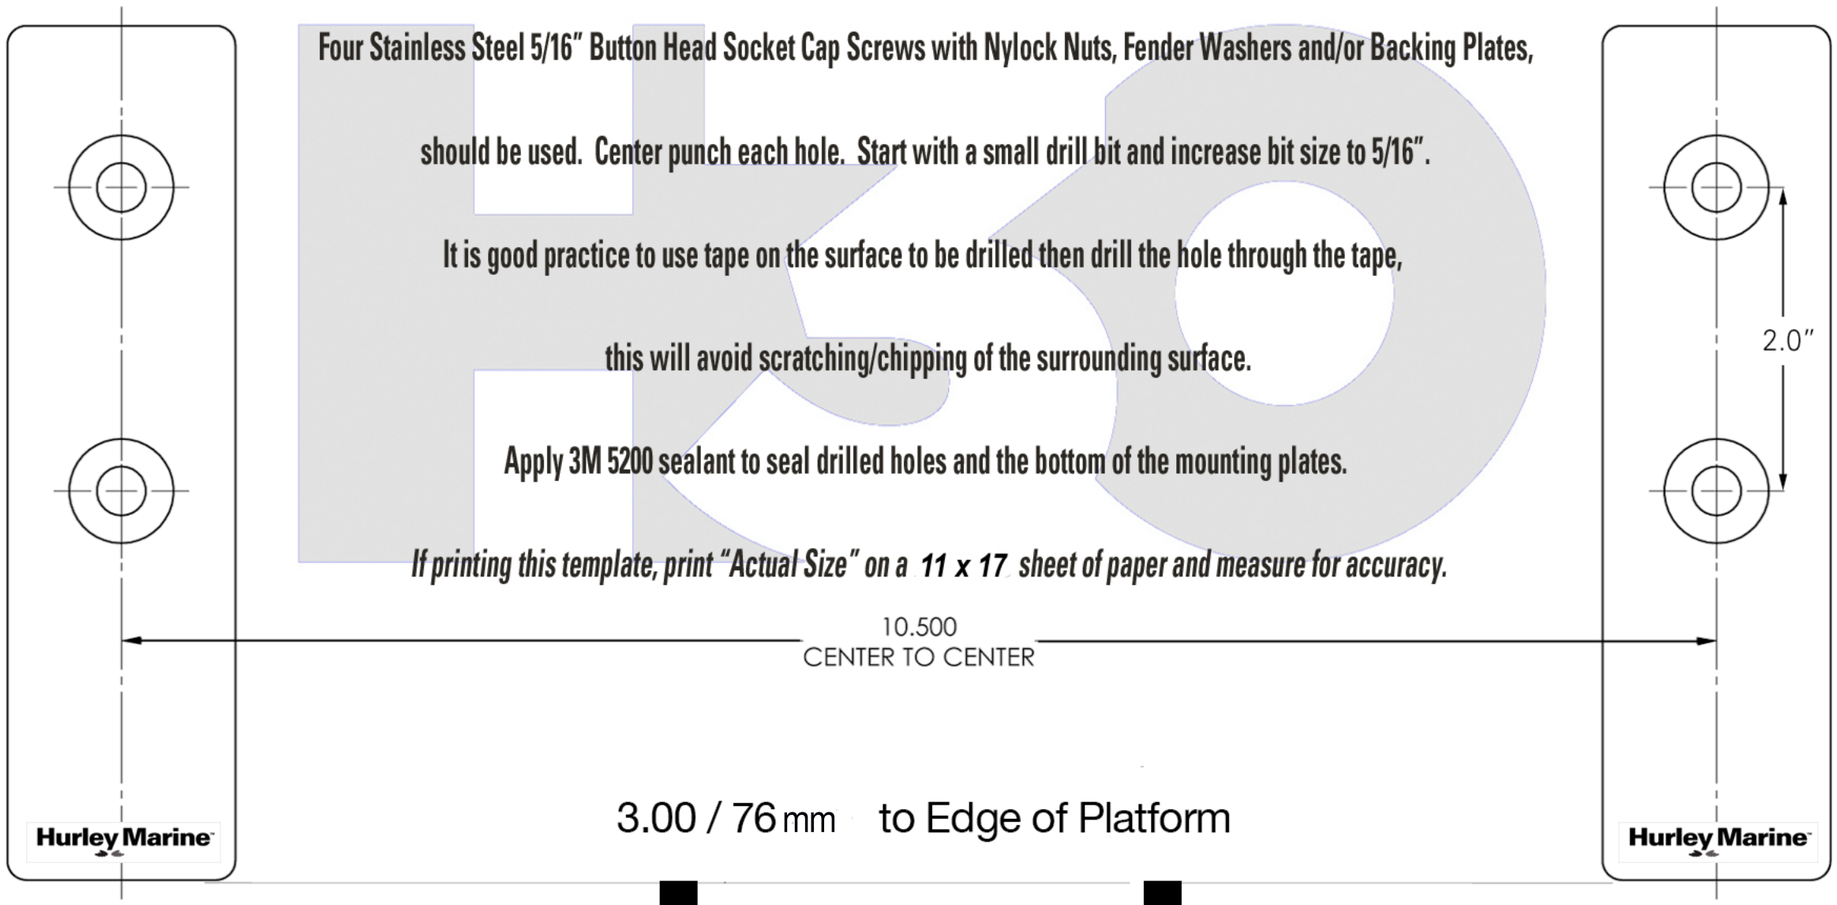
*If printing this template, print "Actual Size" on a **11 x 17** sheet of paper and measure for accuracy.*